


55 寸 3.5 拼接屏规格书 (型号: BVW55-L53S)

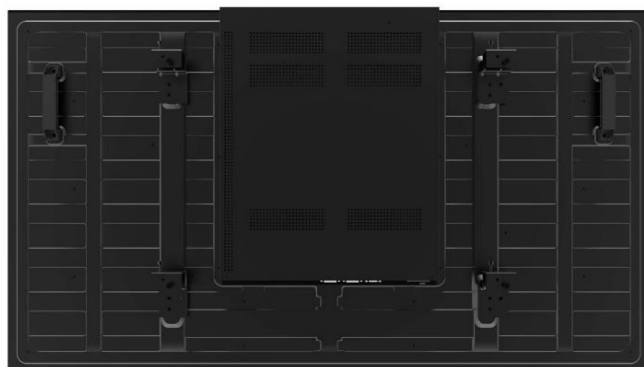

一、产品特性

- 1、IPS 硬屏保证清晰、流畅和真实的效果，明显降低对眼睛的刺激，完全符合健康要求。(The IPS hard screen is clear, fluid and realistic, significantly reducing eye irritation and fully meeting health requirements.)
- 2、色彩真实，画面色彩鲜明、饱和、自然。(The color is true, the picture is bright ,saturated and natural.)
- 3、支持 HDMI、DVI、DP、VGA 等多种信号输入，监视影像更清晰，适用各种专业应用。(Support HDMI,DVI,DP,VGA and other signal input, monitoring image more clear, suitable for a variety of professional applications.)
- 4、支持 4K 超高清拼接，画面精细稳定，打造完美视觉盛宴。(Support 4K UHD splicing, fine and stable picture, create a perfect visual feast.)
- 5、运用自动色彩及图像增强处理器，画质优化，细节显示处理佳。(Use automatic color and image enhancement processor, picture quality optimization, fine detail display Processing.)
- 6、开放式散热设计，整机轻薄。(Open cooling design, the machine is light and thin.)
- 7、支持 U 盘快捷软件升级。(Support USB flash drive quick software upgrade.)

二、规格书

	项目(Item)	参数(Parameter)	
显示参数 (Display)	LCD 尺寸(Size)	54.64"	
	LCD 供应商(Brand)	LG OC	
	背光类型(Backlight Type)	D-LED	
	分辨率(Resolution)	1920 x1080(pixels)	
	亮度(Brightness)	500cd/m²(min)	
		600cd/m²(typ)	
	对比度(Contrast Ratio)	1300:1(typ)	
	响应时间(Response Time)	8ms(typ)	
	像素点距(Pixel Pitch)(mm)	0.63(H) x0.63(V)	
	帧频(Refreshing Frequency)	60 Hz	
	视角(Viewing Angle)	178°(H) / 178°(V)	
	寿命(Life Time)	50,000 hrs(min)	
	色域(Color Gamut)(X% NTSC)	72%(typ.), 68(min)	
	可视面积(View Area)(mm)	1209 .6(H) x680.4(V)	
	色彩度(Display Colors)	1.07B(10bit)	
电气参数 (Electrical)	电压(Power Requirements)	AC 100 V ~ 240 V, 50/60 Hz	
	最大功率(Power Consumption)	<200W	
	待机功率(Standby Consumption)	<0.5W	
	IR-IN	x1	Interface: φ3.5mm mini

MV53-K65A 输入输出接口 (Interface)	USB	x1	Version: USB2.0 Interface: Type-A
	RS232-OUT	x1	Interface: RJ45
	RS232-IN	x1	Interface: RJ45
	HDMI-IN	x1	HDMI 1.4 Max Resolution: 1920× 1080@60Hz
	DVI-IN	x1	Max Resolution: 1920× 1080@60Hz Interface : DVI-D
	VGA-IN	x1	Max Resolution: 1920× 1080@60Hz Interface : DB15
结构参数 (Structure)	裸机外形尺寸(W x D x H) (Product Size (W x D x H))	1213.4mmx88.65mmx684.2mm	
	包装尺寸(W x D x H) (Package Size(W x D x H))	1385mmx348mmx858mm (双屏纸箱包装(Double Box Packing))	
	外壳材料(Housing Material)	钣金(Sheet Metal)	
	外壳颜色(Housing Color)	黑色(Black)	
	面框拼缝(Plane Frame Joint)	3.5mm	
	VESA 孔位 (VESA)	8-M6 螺丝孔 600mmx400mm (8-M6 Screw hole 600mmx400mm)	

环境条件 (Environment)	◆储存湿度: 10% ~ 90% 非凝结。 (Storage humidity 10% ~ 90% RH Non-Condensing) ◆工作湿度: 20% ~ 85% 非凝结。 (Operating humidity 20% ~ 85% RH Non-Condensing) ◆储存温度: -10°C ~ +60°C。 (Storage temperature -10°C ~ +60°C) ◆工作温度: 0 ~ + 40°C。 (Operating temperature 0 ~ + 40°C.) ◆工作海拔: ≤5000m。 (Operating altitude ≤5000m.) ◆使用时长: 24 小时×7 天。 (The longest service time 24 Hours×7 days.)
测试要求 (Test Requirement)	可靠性(Reliability) ◆低温储存: 符合 SJ/T11326-2016.6.1.6 要求。 (Low Temperature Storage Test, complying with SJ/T11326-2016.6.1.6.) ◆低温负荷: 符合 SJ/T11326-2016.6.1.5 要求。 (Low Temperature Load Test, complying with SJ/T11326-2016.6.1.5) ◆高温储存: 符合 SJ/T11326-2016.1.2 要求。 (High Temperature Storage Test, complying with SJ/T11326-2016.1.2.) ◆高温负荷: 符合 SJ/T11326-2016.6.1.1 要求。 (High Temperature Load Test, complying with SJ/T11326-2016.6.1.1.) ◆恒定湿热: 符合 SJ/T11326-2016.6.1.3 要求。 (Steady Damp Heat Test, complying with SJ/T11326-2016.6.1.3.) ESD 要求(ESD) ◆静电放电抗扰度符合 GB/T 17626.2 中接触放电 4KV、空气放电 8KV 的规定, 满足 B 级要求。 (Electrostatic discharge immunity test complying with GB/T

	17626.2 of contact discharge 4KV and air discharge 8KV,meeting the requirement of level .) HSF 要求(HSF) ◆产品符合： 欧盟 RoHS 指令 2011/65/EU 及其修订指令(EU) 2015/863。 (products comply with: EU RoHS Directive 2011/65 / EU and its revised Directive (EU) 2015/863)	
附件 (Accessories)	3m 电源线(3m Power Cord)	x1
	1.8m HDMI 信号线(1.8m HDMI Cable)	x1
	2.0m 网线(2.0m Network Cable)	x1
	合格证(Qualified Certificate Lable)	x1
	说明书(Instruction)	x1
	保修卡(Warranty Card)	x1
	四合一拼接平整角铁(Angle Bar)	x1
	二合一拼接平整角铁(Angle Bar)	x1

三、六视图

